


# MIROR FLUORESCENT HI-BAY

**M X 8  
T 8**


- ◆ T8 lamps maintain over 90% of their original output
- ◆ Consumes 50% of the energy of a 400 watt metal halide and delivers comparable light levels, when replaced one-for-one
- ◆ For additional lighting control and energy savings - occupancy sensor is available
- ◆ Just under 4" tall - allows placement near the ceiling for the optimal usage of space
- ◆ Hinged down reflector
- ◆ Electronic ballast standard
- ◆ All reflective surfaces constructed of enhanced specular anodized aluminum
- ◆ Housing constructed of heavy gauge die-formed cold rolled steel
- ◆ Available with Y-hanger and chain, Grippler Hang-Fast Suspension, or 3/4" hub and splice box
- ◆ UL listed for U.S. and Canada
- ◆ Optical Efficiency = 78.5%  
CRI = 85, High output lamps can be requested  
High Frequency Electronic Ballast > 40 kHz  
5 Year Ballast Warranty  
High Power Factor > 98%
- ◆ Ballast for 4FT lamps the total harmonic distortion < 10% at full light output



4 Lamp T8

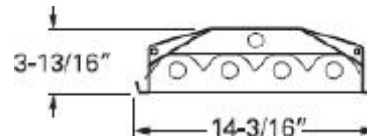

6 Lamp T8

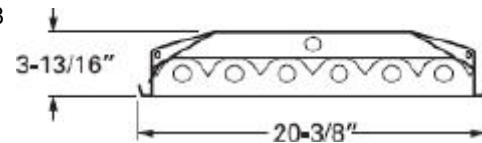

## ORDERING GUIDE

<b>MX</b>	<b>8</b>	<b>-</b>	<b>6L</b>	<b>-</b>	<b>OS</b>	<b>-</b>	<b>33B</b>	<b>-</b>	<b>UNV</b>
SERIES	TYPE		TOTAL LAMPS		OPTIONS		BALLAST TYPE		VOLTAGE

### SERIES

MX MIROR Standard Fixture

### TYPE

8 32 watt T8

### TOTAL LAMPS (ship w/ fixtures - 741K)

4L 4 lamps  
6L 6 lamps

### ACCESSORIES (ship separately)

W6 Wireguard  
Y Y-hanger (1 pair)  
Y3 Y-hanger & 3' chain (1 pair)  
LENS4 Clear acrylic lens, 4 lamp  
LENS6 Clear acrylic lens, 6 lamp  
SB 3" spacer bracket (1 pair)  
G10 Grippler Hang-Fast Suspension, 10' length (1 pair)

### OPTIONS (ship with fixture)

OS Occupancy Sensor\*  
6C Cord, 6' length, black  
6C15TP 6' black cord, 15 amp, twistlock plug (voltage specific)  
6C20TP 6' black cord, 20 amp, twistlock plug (voltage specific)  
HUB 3/4" cast iron hub and junction box  
HH Hub mount and hook  
WREFL White reflector  
F32/841 Fluorescent lamp, 32 watt, 4100K (CEE Approved)  
F32/850 Fluorescent lamp, 32 watt, 5000K  
E8 Emergency ballast, T8

### BALLAST TYPE

2B (2) 2 lamp ballast  
4B (1) 4 lamp ballast  
33B (2) 3 lamp ballasts  
42B (1) 4 lamp & (1) 2 lamp ballast  
222B (3) 2 lamp ballasts

(CEE Approved Ballast Available)

### VOLTAGE

120 120V  
208 208V  
240 240V  
277 277V  
UNV 120 - 277V  
347\*\* 347V

\* Fixtures equipped with occupancy sensor must have a specified input voltage  
\*\* Only available in 2 lamp ballasts  
\*\*\* Ballast(s) are 277V input. Fixture furnished with 480/277V step down transformer. Fixture accepts 480V supply voltage

