


MIRO R FLUORESCENT HI-BAY STIMULUS

MXS8
T8

- ◆ Up to 8 lamps (8 foot version available)
 - ◆ High gloss polyester white paint
 - ◆ Side mount access plate
 - ◆ Vented ballast channel
 - ◆ Cold start ballast options available
 - ◆ UL Listed for US & Canada
 - ◆ T8 lamps maintain over 90% of their original output and provide good color rendition
 - ◆ Consumes 50% of the energy of a 400 watt metal halide and delivers comparable light levels, when replaced one-for-one
 - ◆ For additional lighting control and energy savings - occupancy sensor is available
 - ◆ Just under 4" tall - allows placement near the ceiling for the optimal usage of space
 - ◆ Electronic ballast standard
 - ◆ All reflective surfaces constructed of Enhanced specular anodized aluminum
 - ◆ Housing constructed of heavy gauge die-formed cold rolled steel
 - ◆ Available with Y-hanger and chain, Gripple® Hang-Fast Suspension, or 3/4" hub and splice box
 - ◆ CRI = 85, High output lamps can be requested
- High Frequency Electronic Ballast > 40 kHz
- 5 year Ballast Warranty
- High Power Factor > 98%

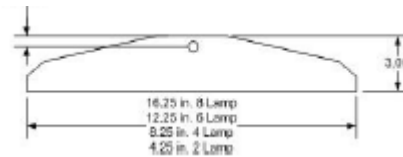

ORDERING GUIDE

MXS	-	T8	-	4L	-	6C	-	4B	-	UNV
SERIES		TYPE		TOTAL LAMPS		OPTIONS		BALLAST TYPE		VOLTAGE

SERIES

MXS MIRROR STIMULUS

TYPE

8 32 watt T8

TOTAL LAMPS (ship w/ fixtures - 850K)

2L 2 lamps
4L 4 lamps
6L 6 lamps
8L 8 lamps

ACCESSORIES (ship separately)

W6 Wireguard
Y Y-hanger (1 pair)
Y3 Y-hanger & 3' chain (1 pair)
SB 3" spacer bracket (1 pair)
G10 Gripple Hang-Fast Suspension, 10' length (1 pair)

OPTIONS (ship with fixture)

OS Occupancy Sensor*
6C Cord, 6' length, black
6C15TP 6' black cord, 15 amp, NEMA twistlock plug (voltage specific)
6C20TP 6' black cord, 20 amp, NEMA twistlock plug (voltage specific)
HUB 3/4" cast iron hub and junction box
HH Hub mount and hook
WREFL White reflector
F32/841 Fluorescent lamp, 32 watt, 4100K (CEE Approved)
E8 Emergency ballast, T8

BALLAST TYPE

2B (2) 2 lamp ballast
4B (1) 4 lamp ballast
33B (2) 3 lamp ballasts
42B (1) 4 lamp & (1) 2 lamp ballast
222B (3) 2 lamp ballasts

(CEE Approved Ballast Available)

VOLTAGE

120 120V
208 208V
240 240V
277 277V
UNV 120 - 277V
347** 347V
480*** 480V

* Fixtures equipped with occupancy sensor must have a specified input voltage
** Only available in 2 lamp ballasts
*** Ballast(s) are 277V input. Fixture furnished with 480/277V step down transformer. Fixture accepts 480V supply voltage

